



**READ AND FOLLOW ALL SAFETY INSTRUCTIONS!
SAVE THESE INSTRUCTIONS AND DELIVER TO OWNER AFTER INSTALLATION**

IMPORTANT SAFETY INSTRUCTIONS

▲ WARNING

To reduce the risk of death, injury or property damage from fire, electric shock, cuts, abrasions, falling parts, and other hazards:

- Service of the equipment must be performed by qualified service personnel.
- Installation and maintenance must be performed by a person familiar with the construction and operation of this product and any hazards involved. All applicable codes and ordinances must be followed.
- Read this document before installing, servicing, or maintaining this equipment or installing a lamp. These instructions do not cover all installation, service, and maintenance situations. If your situation is not covered, or if you do not understand these instructions or additional information is required, contact *Lithonia Lighting* or your local *Lithonia Lighting* Distributor.
- Read and follow all warnings and instructions provided by the lamp manufacturer.

▲ WARNING

Before installing, servicing, or maintaining this equipment, follow these general precautions.

To reduce the risk of electrocution:

- Make sure the equipment is properly grounded.
- Always de-energize the circuit and/or equipment before connecting to, disconnecting from, or servicing the equipment.


To reduce the risk of fire:

- Keep material away that can burn from hot lamp.
- Make sure lamps are correctly installed.
- Use supply conductors with a minimum installation temperature rating as specified on equipment.

To reduce the risk of personal injury from cuts, abrasions, or falling parts:

- Wear gloves to prevent cuts or abrasions from sharp edges when removing from carton, handling and maintaining this equipment.
- Do not use abrasive materials, glass cleaners or other solvents on reflector or lens. These substances may damage equipment and cause parts to eventually break and fall.
- Do not install a damaged fixture.

▲ CAUTION: Observe lamp manufacturer's recommendations and restrictions on lamp operation, including but not limited to ballast type, burning position, replacement and cycling. Use only lamps that comply with applicable ANSI standards.

NOTICE: If lamp is marked  it contains mercury. Follow disposal laws. See www.lamprecycle.org

Lithonia Lighting, a division of *Acuity Brands Lighting*, Inc., assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

SAVE THESE INSTRUCTIONS



TROUBLE SHOOTING

If this fixture fails to operate properly, check to make sure:

- The Correct lamp is properly installed.
- The fixture is wired correctly.
- The lamp is not faulty.
- The fixture is grounded correctly.
- The line voltage at the fixture is correct.

I-BEAM INSTALLATION INSTRUCTIONS

INSTALLATION OF THIS FIXTURE IN ANY OTHER MANNER THAN WHAT IS INDICATED WITHIN THE SUPPLIED INSTRUCTIONS WILL VOID ALL WARRANTIES.

These instructions are for NORMAL On/Off operations.


Remove fixture from packaging.

Ensure proper voltage will be supplied to the fixture. Check the fixture label on the carton for fixture voltage. **FIXTURE MUST BE GROUNDED BEFORE USE.**

WIRING OF FIXTURE

1. Remove back access plate by removing 1 phillips screw. Retain the screw and access plate for re-installation. (Picture #1)

Picture #1



Picture #2

2. Remove the twist tie and separate the wires. (Picture #2)



3. Attach the conduit connector to the access plate in accordance with your local electrical code. Push the wires through the knock out on the access plate and wire to the supply wire as shown in (pictures #3 and #4.) Ensure wires are not being pinched. Make all necessary wiring connections, observing proper voltage and polarity.


Picture #3



Picture #4

4. Center the access plate to the back of the fixture. Re-attach the access plate.





INSTALLING BATTERY PACK SUPPLIED WITH THE FIXTURE


NOTE: BATTERY PACKS SUPPLIED WITH 6 LAMP T5 LAMPS WILL NOT BE INSTALLED IN THE FIXTURE. THE BATTERY IS EXTERNALLY MOUNTED ON THE BACK SIDE OF THE CHANNEL.

Battery unit comes with Pilot light / Test Switch connector disconnected to prevent shock and battery discharge.

1. Plug positive end of battery wiring harness to positive end of fixture wiring harness. Harness is accessible through the open hole on the back of the fixture.




2. Plug pilot light / test switch into battery.

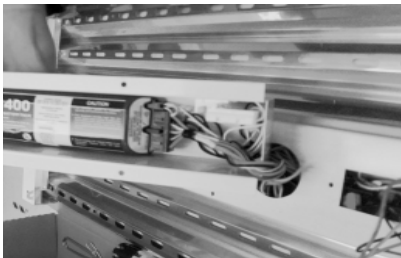

3. Verify battery operation by engaging pilot light / test switch. If wired correctly, 1 lamp will illuminate.



Keeping battery in the battery box, secure box to back of channel with the 4 screws provided. Do not over tighten. Over tightening will cause stripping and void all warranties.

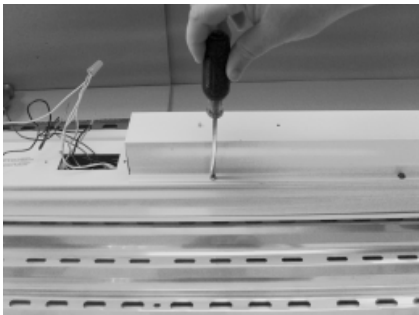



WIRING INFORMATION

STANDARD WIRING

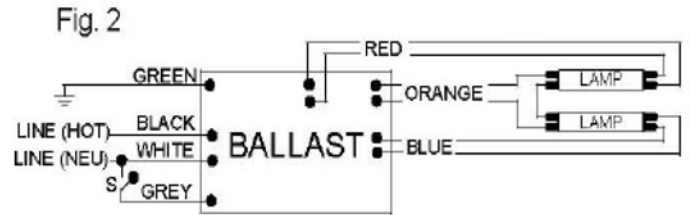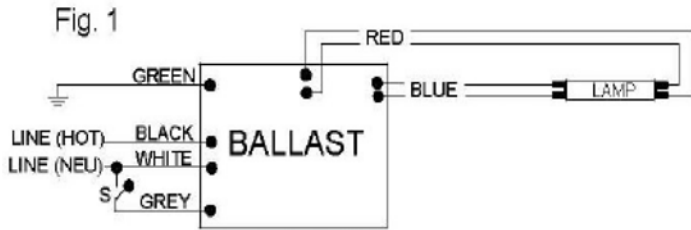

LAMP SWITCHING WIRING

