



## KitchenAid® 26.8 cu. ft. 36-Inch Width Standard Depth French Door Refrigerator with Exterior Ice and Water

KRFF507HPS

### Available Finishes/Colours



KRFF507HBS  
Black Stainless Steel with PrintShield® #8482; Finish



KRFF507HPS  
Stainless Steel with PrintShield® #8482; Finish

### Dimensions

Depth	36 5/8
Height	69 7/8
Width	35 11/16
Height To Top Of Cabinet	68 5/8
Depth With Door Open 90 Degree	48
Depth Excluding Handles	33 1/4
Depth Closed Including Handles	36 5/8

### Performance

Freezer Capacity	7.77
Refrigerator Capacity	19.03
Capacity	26.8

### Performance

Energy Star® Qualified	ENERGY STAR® Qualified
------------------------	------------------------

### Refrigerator Features

Humidity-Controlled Drawers	2 Half-Width
Lighting	LED
Number of Interior Shelf(s)	5
Spill-Proof Glass Shelf(s)	1 Slide Out Full Width, 4 Adjustable Half-Width
Temperature-Controlled Drawers	1 Full-Width Pantry
Door Bins	2 Fixed Gallon, 3 Adjustable Gallon

### Freezer Features

Freezer Light	LED
---------------	-----

This 26.8 cu. ft. french door refrigerator helps fresh produce stay that way with the ExtendFresh™ Temperature Management System. A pull-out tray accommodates large platters with ease, while a FreshChill™ Temperature-Controlled Full-Width Pantry lets you optimize temperature and airflow for the specific food you're storing. The refined interior design features LED lighting, and metallic accents add a touch of elegance.<sup>1</sup>

### Top Features

PrintShield™ Finish

ExtendFresh™ Temperature Management System

Pull Out Tray

### Manuals & Literature:



Use and Care



Dimension Guide



Energy Guide



Warranty

# KitchenAid® French Door Bottom Mount Refrigerator

## PRODUCT MODEL NUMBER:

KRFF507H

## ELECTRICAL AND WATER REQUIREMENTS:

**Electrical:** A 115 volt, 60 Hz, AC only 15 or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water:** A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.



**NOTE:** If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

### Reverse Osmosis Water Supply

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

## PRODUCT DIMENSIONS:

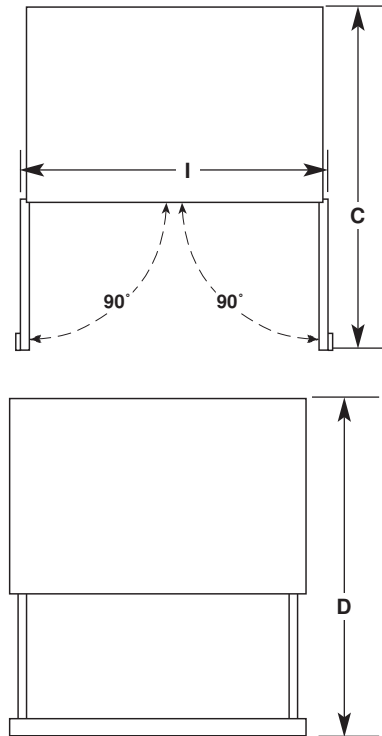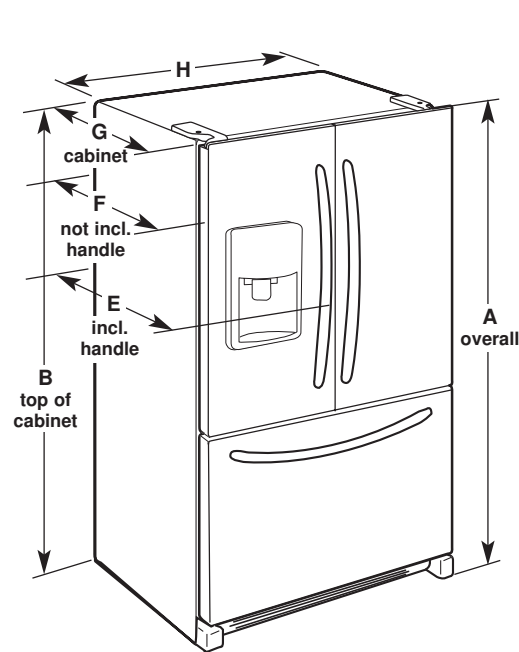

Model Number	KRFF507H
Model Size	27 cu. ft. (764.6 L)
Height - Overall "A"	70 <sup>1</sup> / <sub>8</sub> " (178.1 cm)
Height - Top of Cabinet "B"	68 <sup>3</sup> / <sub>4</sub> " (174.6 cm)
Depth - Doors Open 90° "C"	48 <sup>5</sup> / <sub>8</sub> " (123.5 cm)
Depth - Drawer Open With Handles "D"	54 <sup>1</sup> / <sub>4</sub> " (137.8 cm)
Depth - With Handles "E"	36" (91.4 cm)
Depth - Without Handles "F"	33 <sup>3</sup> / <sub>4</sub> " (85.7 cm)
Depth - Cabinet Only "G"	29 <sup>5</sup> / <sub>8</sub> " (75.2 cm)
Width - Cabinet Only "H"	35 <sup>5</sup> / <sub>8</sub> " (90.5 cm)
Width - Doors Open 90° "I"	38 <sup>3</sup> / <sub>8</sub> " (97.5 cm)

## LOCATION REQUIREMENTS:

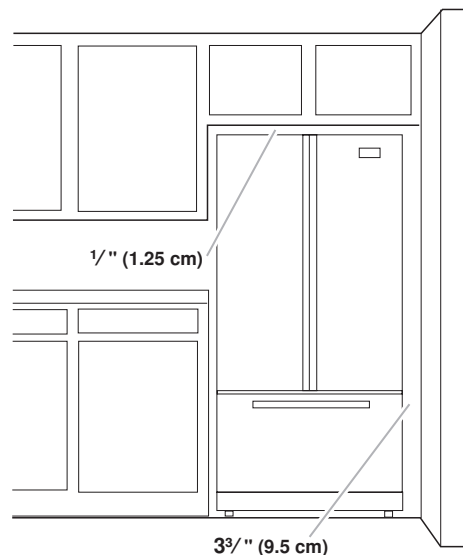

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3<sup>3</sup>/<sub>4</sub>" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.