

Assembly Instruction Sheet #IS-1090W14-2

For Style 1090W14-2

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (2) 120V LED *1W DIMMABLE (4000K).


Estimated Assembly Time: 15-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

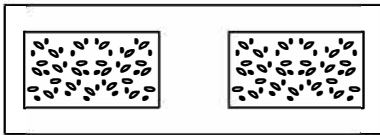

A Fixture Body x1



B Glass x4

Hardware Contents


PART	DESCRIPTION	QUANTITY
AA	Wire nut	3pcs
BB	Outlet Box Screw	4pcs
CC	Mounting Screw	4pcs
DD	Mounting bracket	1pcs

AA

BB

CC

DD



STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket.

A. Line up a set of holes on the Mounting bracket (DD) and Holes on the Backplate. Thread Mounting Screws (CC) into the holes on the Mounting bracket (DD). Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (CC). Hand tighten until snug.

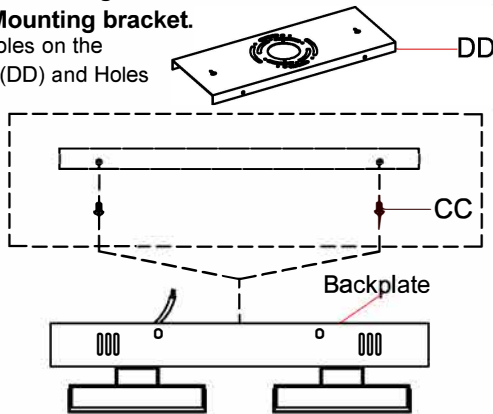


Figure 1

STEP 2 – Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (DD).

Attach the Mounting bracket (DD) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.

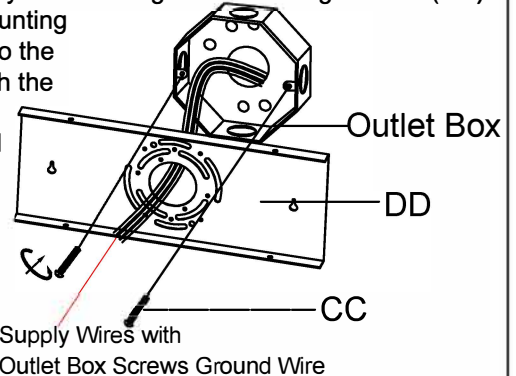


Figure 2

STEP 3 – Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

White wire from outlet box

White wire from fixture

Black wire from outlet box (or Red)

Black wire from fixture

Bare, or Green Ground wire from outlet box

Ground wire from fixture

Bare, or Green Ground wire from outlet box

Ground wire from fixture

Green Ground Screw on the Crossbar

Figure 3